

APPLICATION: 2 Axle 2S2M SIDE BY SIDE WABCO ABS


PART #: **PAK2S2MS-2-W1**

CONTENTS: Glad hand assemblies

- Air tank with installed drain valve and plugged unused ports
- Air tank mounting kit with pads, bolts, washers and lock nuts
- Brake valve(s) are installed and include push to connect fittings
- Hoses with swivel hose ends are installed to valve(s)
- Two speed sensors, sensor bushings and sensor extensions
- WABCO ABS power cord
- Hose separators and sensor cable retainers


OPTIONAL SYSTEMS

PAK2S2MS-2-W2
TRAMEC SPRING BRAKE VALVE




DA4204 (TEV) SB PRIORITY

PAK2S2MS-2-W5
SEALCO SPRING BRAKE VALVE




DA4201 (110500) SB PRIORITY

PAK2S2MS-2-W7
SEALCO SPRING BRAKE VALVE




DA4201A (110700) SVC PRIORITY

PAK2S2MS-2-W8
SEALCO SPRING BRAKE VALVE



DA4201B (110800) SB PRIORITY

SPECIFY YOUR HOSE LENGTHS BELOW

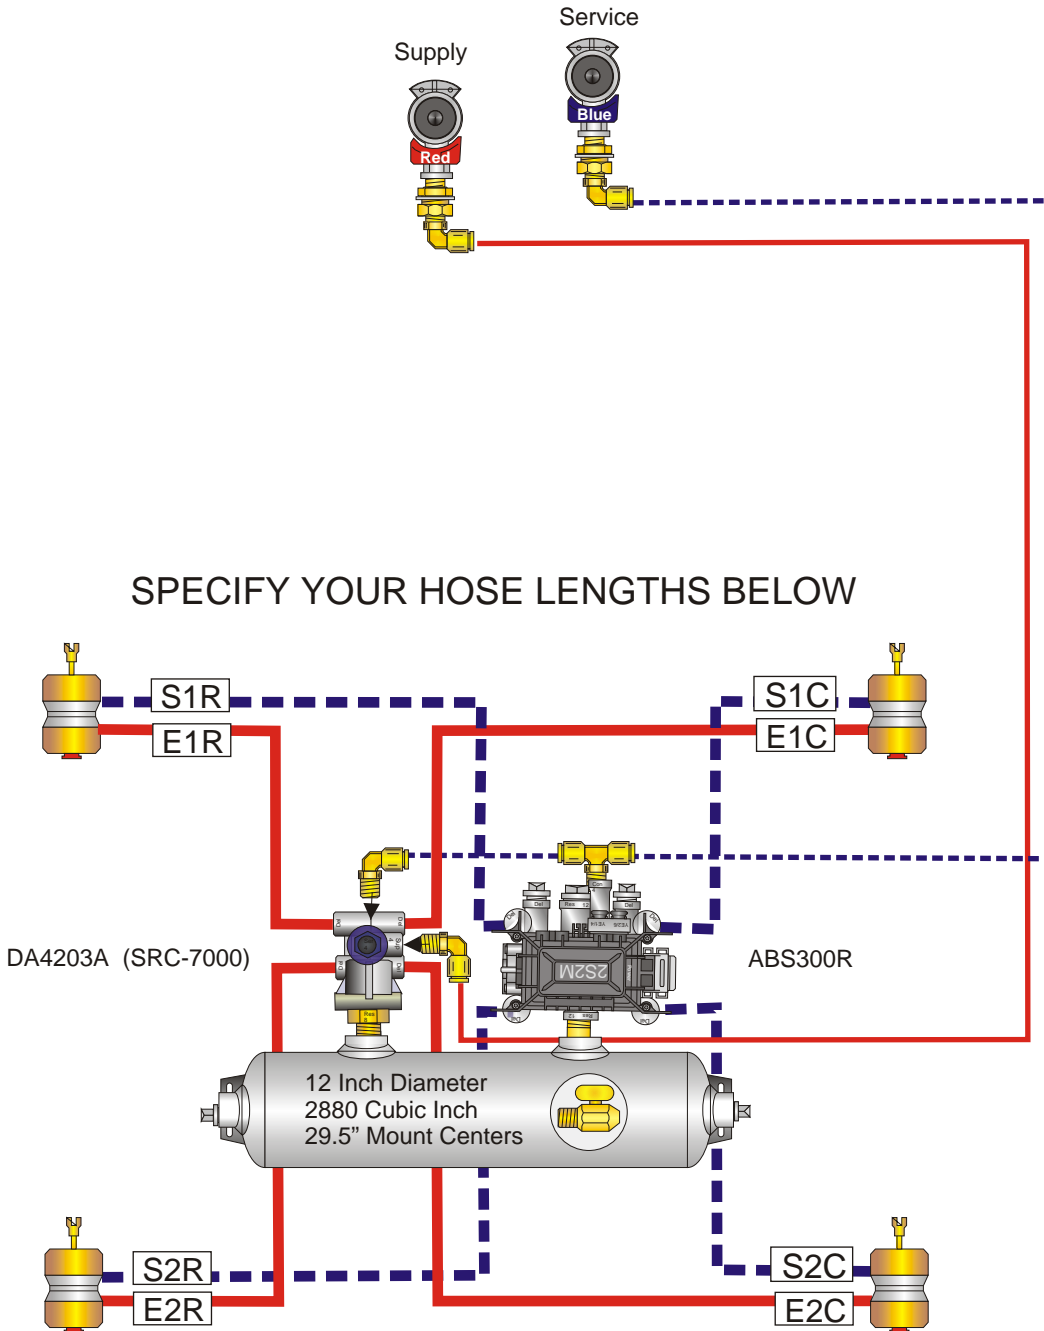


SPECIFY HOSE LENGTH IN INCHES
EMERGENCY:

E1R	E1C
E2R	E2C
E3R	E3C

SERVICE:

S1R	S1C
S2R	S2C
S3R	S3C
S4R	S4C



Specifications:

Hoses meet J1402 & JT106 specifications and are 3/8 ID unless otherwise noted. Reservoirs meet J10B specifications
Pipe fittings are brass or plated SH80 steel. Push-in style 3/8 tube fittings standard. ABS Electronics pre-tested before shipment.